

4/5 GAS EXHAUST ANALYZER

TEST DON'T GUESS DRIVEABILITY PROBLEMS

Model 5002 is a portable stand alone unit able to test a vehicle in your shop or on the road. Power is supplied by the vehicle under test or an optional 110/220 VAC converter.

Designed to meet BAR 97 (EPA ASM) and OIML R99 Class 0 standards, and uses all updated electronics and display. The compact unit & robust metal housing is designed to withstand the most difficult shop or mobile environments.



The unit can be shipped as a four or five gas analyzer. The four gas unit can be upgraded to five gas or wireless.



PORTABLE

UNDER 10 LBS

- New updated electronics
- Automatic zero and span adjustment
- 3"X5" digital display with back light
- Error code menu
- Heavy duty filter/sample systems
- Serial PC interface or wireless interface
- Parallel Printer interface
- Fast response time and low drift
- 1 yr. Parts & labor, 18 Month Optical warranty
- Made in USA
- 12 VDC power from the car or battery pack
- Fast warm up time less 10 min.
- Easy to operate
- Low maintenance/24 hr. full factory service
- Stand alone or Portable

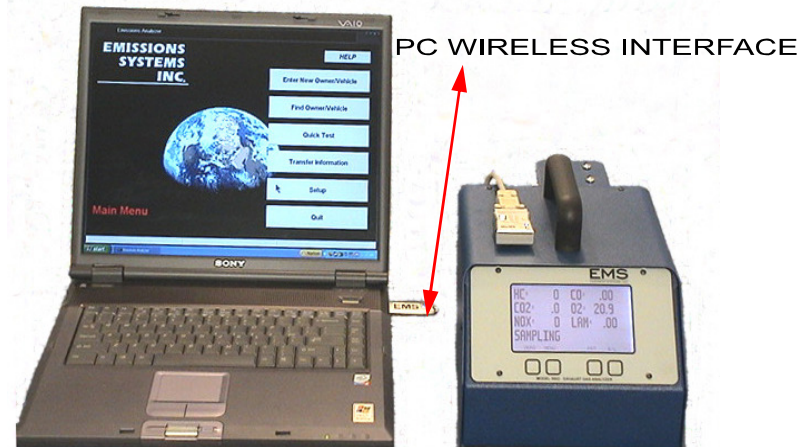

WINDOWS SOFTWARE AVAILABLE FOR GRAPHING AND STORING ALL ANALYZER READINGS AND CUSTOMER INFORMATION


EMS
EMISSIONS SYSTEMS, INC.

EMISSIONS SYSTEMS INC.
P.O. BOX 7086
ALGONQUIN, IL. 60102
VOICE & FAX: 847-669-8044
E-MAIL: sales@msgas.com
WEB SITE: www.emsgas.com

TEST DON'T GUESS
DRIVEABILITY
PROBLEMS


Use the EMS 5002 as a stand alone or connect to a PC via the serial port, using the optional software to review test results on the screen and print on your printer. Wireless PC interface available.

Use the optional Windows software with a laptop PC, to record data on the road. On your return to the shop, analyze the data in a variety of graphic formats and print the results on your printer. Heavy duty filter system most reliable in the industry with new water separator. Easy calibration routine.

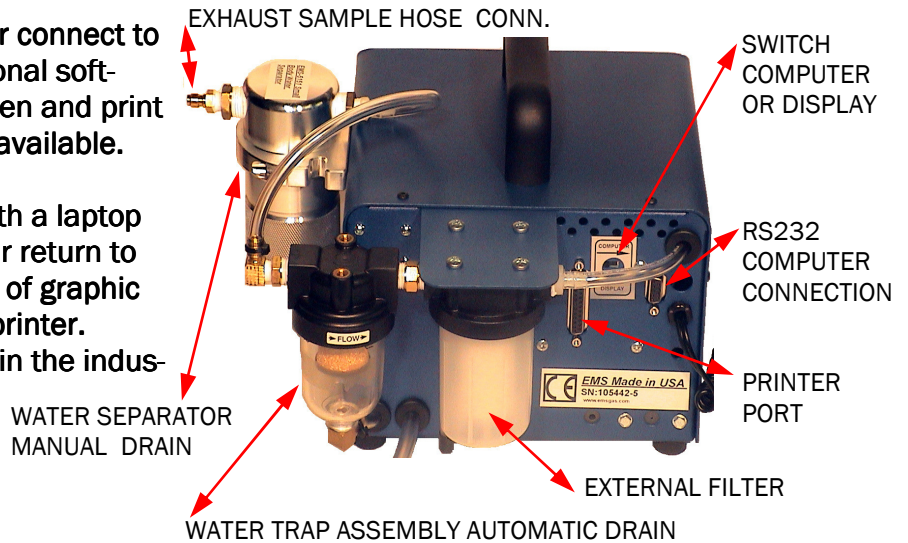

Specifications EMS 5002:

- Power: 10 -16 VDC (110/220 VAC 50/60 Hz optional)
- Ranges:
 - HC: 0 - 2000 ppm Low Range
 - HC: 0-20,000 ppm High Range
 - CO: 0 - 10%
 - CO2: 0 - 20%
 - O2: 0 - 25%
 - NO: 0 - 5000 ppm (Nitric Oxide) *
- Warm up: Less than 5 minutes
- Display resolution:
 - HC: 1 ppm vol.
 - CO: 0.01% vol.
 - CO2: 0.1% vol.
 - O2: 0.01% vol.
 - NO: 1ppm*
- Digital display: 3" x 5" LCD Displays all 5 gases, & AFR or LAMDA
- Accuracy (Bar 97 EPA ASM)
 - HC: 4 ppm HC
 - CO: 0.02% CO
 - CO2: 0.3% CO2
 - O2: 0.1% O2
 - NO: 25 ppm*
- Drift: Zero and span drift are less than $\pm 0.6\%$ of full scale for the first hour and less than $\pm 0.4\%$ of full scale per hour thereafter.
- System response time: Bench: 1.5 Sec/25 ft. hose 5 sec. to 90% of final reading
- Ambient conditions: 35F (2C) to 120F (45C), rel. humidity 0-98%
- Sample hose: 25 feet (7.5 m) with QD coupling /200 F Degrees Max.
- Sample probe: Stainless steel 1200 Degrees F (replaceable flex tip)
- Mass: Approx.: 10 LBS. (4.5 Kg)

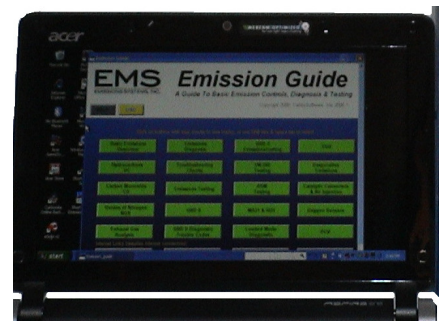

Emissions Guide Software FREE w/ Analyzer

EMISSIONS SYSTEMS INC.

PO BOX 7086, ALGONQUIN IL. 60102
 TEL./FAX : 847-669-8044
 E-MAIL: sales@msgas.com
 WEB SITE: www.msgas.com

